

Appliances properties: Wodtke GmbH - soleo.nrg H10 6kW (PO03-11) RLA

ate of entry	Nov 7, 2018
anufacturer	Wodtke GmbH
odel	soleo.nrg H10 6kW (PO03-11) RLA
ominal heat output [kW]	6
clared nominal space heating output [kW]	6
rtial load [kW]	2
ntinuous burning appliance	_
e test standard	DIN EN 14785
ar of testing	2018
at laboratory	RRF Rhein-Ruhr-Feuerstättenprüfstelle GmbH
mber of test laboratory	2
mber of test report	RRF - 85 17 4767-1

Flue gas values	
	Pellets
Flue gas mass flow [g/s]	4.7
Flue gas mass flow [g/s]	189
Necessary flue draught [Pa]	9
Further important characteristics of the appliance	
Suitability for installation to a shared flue ¹⁾	_


Connectivity to the central heating system

General technical approval for room sealed operation

On behalf of the manufacturer, the HKI Industrieverband e.V. hereby confirms compliance with the respective requirements* in accordance with 1.BImSchV. The type test report of the fireplace has been submitted to the HKI Industrieverband e.V.

¹⁾ For unsealed operation it is possible to install the appliances to a shared flue system (please see installation manual).

^{*} A green check mark with a "1" indicates that the requirements of the 1st BImSchV are fulfilled, a green check mark with a "2" indicates that the 2nd level of the 1st BImSchV is fulfilled. A yellow check mark shows that the transitional regulation of the 1st BImSchV is fulfilled and a red line means that the 1st BImSchV is not fulfilled.

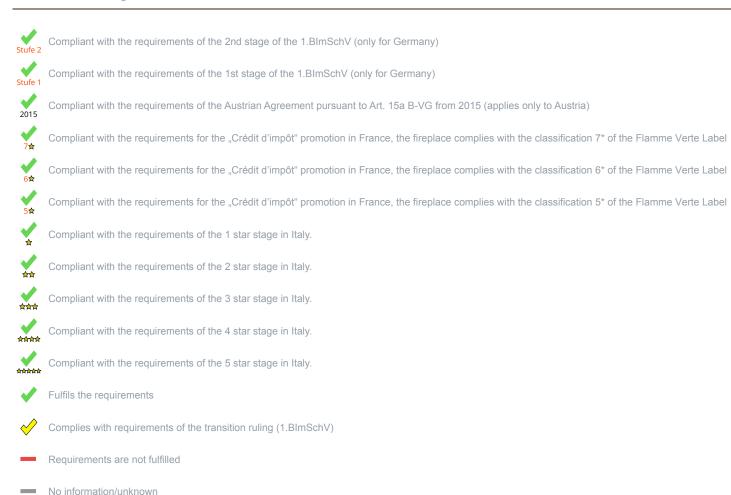

No symbol means that there are no requirements.

No measuring values are available for this fuel, operation with this fuel is not permitted

Here you will find further information